

DH-IPC-HDW1200RP-S3-DIP

2MP HDCVI IR Eyeball Camera




HDCVI



Features :

- Max 30fps@1080P
- HD and SD output switchable
- 3.6mm fixed lens (2.8mm, 6mm optional)
- Max. IR length 20m, Smart IR
- DC12V

Dimension :

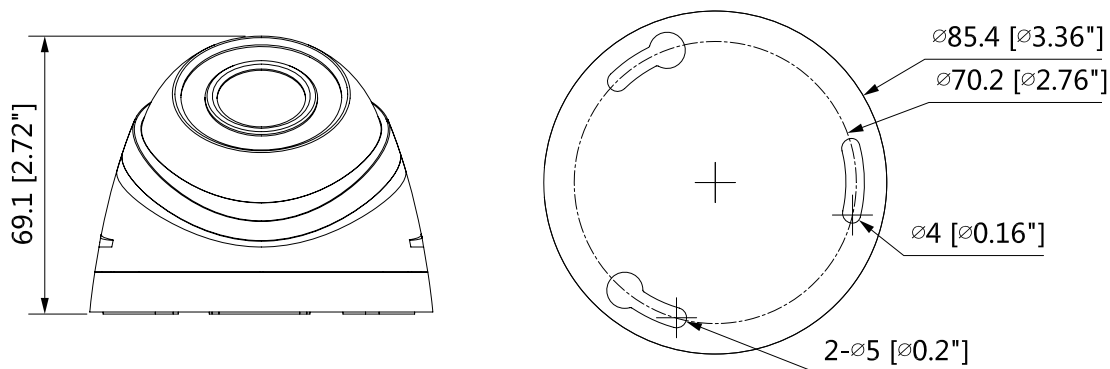

TECHNICAL SPECIFICATIONS

Model	DH-IPC-HDW1200RP-S3-DIP
Camera	
Image Sensor	1/2.7" CMOS
Effective Pixels	1920(H)×1080(V), 2MP
Electronic Shutter	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Video Frame Rate	25/30fps@1080P, 25/30/50/60fps@720P
S/N Ratio	More than 65dB
Mini. Illumination	0.02Lux/F1.85, 30IRE, 0Lux IR on
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Camera Features	
Max Aperture	F1.85
Lens Type	Fixed lens / Fixed iris
Day/Night	N/A
Focus Control	2D
BLC Mode	BLC / HLC / DWDR
Lens	
Focal length	3.6mm (2.8mm, 6mm Optional)
Angle of View	H: 89.9° (103°, 54.7°)
Close Focus Distance	600mm (900mm, 2000mm) 23.62" (35.43", 78.74")
General	
Power Supply	12V DC ±25%
Power Consumption	Max 3.2W (12V DC, IR on)
Working Environment	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH * Start up should be done at above -40°C (-40°F)
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
IP & Vandal Resistance	NA
Dimensions(W× D× H)	Φ85.4mm×69.1mm(Φ3.36"×2.72")
Weight	0.11kg (0.24lb)
Material	Plastic

DIP Switch



Switch 1	Switch 2	Output Mode
OFF	OFF	CVI
ON	ON	CVBS
ON	OFF	AHD
OFF	ON	TVI