

EMCS-662 Ceiling Speaker




Features

- > Made of high-class steel and formed by stamping
- > 100V, 1 ~ 6W with multiple terminals, suited for different field
- > Max. Sound Pressure Level $97 \pm 2\text{dB}$, Effective Freq. Range 80Hz ~ 20kHz
- > Weight 1.0 kg. Equipped with clamps for mounting convenience
- > Driver surround excellent damping, high sensitivity $91 \pm 2\text{dB}$, long life, clear and sonorous sound

Model	EMCS-662
Full Range Speaker/HF Driver	6.5" x 1
Power RMS	1W - 2W - 3W - 6W
Line Voltage Input	100V
Sensitivity (1W/ Rated at 1m)	91dB \pm 2dB
Max Sound Pressure Level (1m)	97dB \pm 2dB
Frequency Response	80-20,000Hz
Dimensions (L x H x W)	$\phi 199 \times 98\text{mm}$
Hole Size - Installation	$\phi 168 \times \phi 176\text{mm}$
Weight	1.0kg

Dimensions

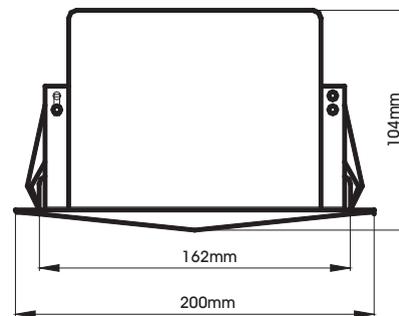

Installation

